

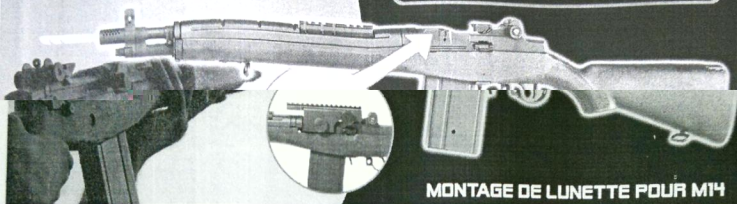


ERATIONS SPECIAL OPERATIONS

M14 SCOPE MOUNT




MONTAGE DE LUNETTE POUR M14




◆ Slide the triangular shape part in the slot as shown on the picture.

◆ Glissez la pièce en forme de triangle dans la glissière comme montré sur la photo.



◆ Screw to immobilize the part with the supplied Allen key. Do not tighten excessively.

◆ Vissez pour immobiliser l'ensemble avec la clé Allen fournie. Ne serrez pas exagérément.



◆ Install the nut on the hole forward of the support, with the supplied key if necessary.

◆ Installez l'écrou sur le trou avant du support, si nécessaire à l'aide de la clé fournie.



◆ Install the support by taking care to match perfectly the holes and to put the corresponding screws (the longest is for the front of the support - the shortest is for the front of the support).

◆ Installez le support en prenant soin de bien aligner les trous et de bien placer les vis correspondantes (la plus longue pour la partie Avant du support - la plus courte pour l'arrière du support).



Adjust the scope (see page 10 under 10 on the rifle). For the scope to be adjusted with the lock, turn the lock clockwise and then the scope (1).

Adjust the scope (see page 10 under 10 on the rifle). For the scope to be adjusted with the lock, turn the lock clockwise and then the scope (1).

Adjust the scope (see page 10 under 10 on the rifle). For the scope to be adjusted with the lock, turn the lock clockwise and then the scope (1).